

(EN) FOR CLEAR OPENING HEIGHTS OF MORE THAN 2100 mm USE
FIBRE-REINFORCED PLASTERBOARD SHEETS WITH LONGITUDINAL
FLEXURAL STRENGTH > 725 N AND TRANSVERSE TENSILE
STRENGTH > 300 N


A dokumentumban megadott információk csak tájékoztató jellegűek. A SCRIGNO S.p.A. nem vállal felelősséget a nyomdai hibákból, átkövetései hibáiból vagy bármilyen más okból adódó pontatlanságokért, és fenntartja a jogot a termékeinek javítása érdekében történő módosítások végrehajtására, előzetes értesítés nélkül. A dokumentum, így annak részleges másolása is, szigorúan tilos a jogszabályok értelmében.

The information given in this document is for descriptive purposes only.
SCRIGNO S.p.A. will not be held responsible for any inaccuracies caused by
printing errors, transcription errors or for any other reason, and reserves the right to
make modifications, without giving prior notice, for the improvement of its products.
The reproduction, including the partial reproduction, of this document is severely
prohibited within the terms of the Law.

SCRIGNO

Scrigno SpA | scrigno.com
via Casale Sant'Ermele 975
47822 Santarcangelo di Romagna (RN)
ph. + 39 0541 757111
info@scrigno.com

IS-0405 Rev.0

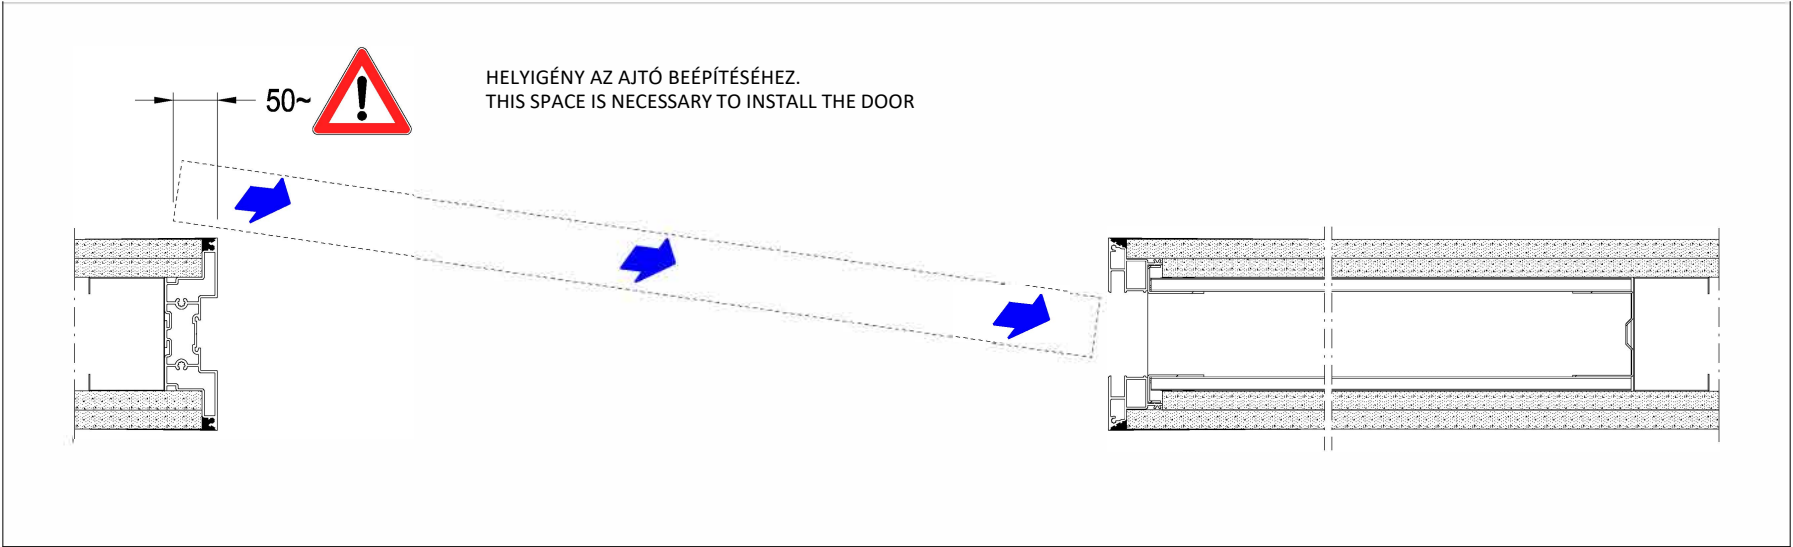

**A GIPSZKARTON FELHELYEZÉSE.
APPLICATION OF PLASTER.**



FONTOS! Az összeszerelés során a szabad átjárhatósági méret 10mm-el csökken!
PLEASE NOTE: THAT DURING THE ASSEMBLY OF THE SINGLE FRAME THE CLEAR OPENING SIZE WILL BE 10 mm REDUCED.

